



VIDEO INTERCOM

miro

HANDS-FREE VIDEO DOORPHONE
REF.1750/15 - 1750/16

- Possibility of connection with other indoor stations
- Automatic door opener service
- Auto-on function
- Possibility of connection with existing 2Voice system
- Compact
- Built-in induction loop for hearing-aid users
- 2-channel integrated Yokis transmitter




VIDEO INTERCOM

miro


HANDS-FREE VIDEO DOORPHONE REF.1750/15 - 1750/16



Components description and features:

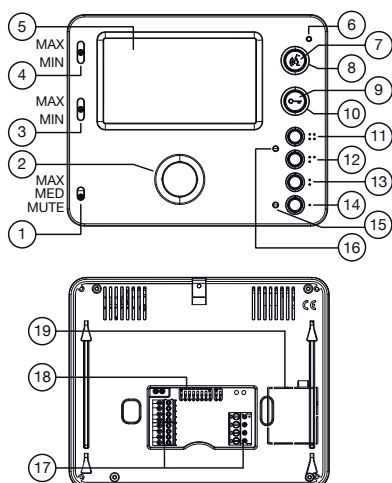

1750/15 - 1750/16


- 16:9 colour hands free monitor display 4.3"
- Colour: polished white, polished black
- Call volume regulation
- Ringer selection for outdoor call and floor call
- MUTE function
- Brightness and colour adjustment
- Door opener button and 2 additional buttons for additional functions (entrance opening, staircase light control, exchange call, etc.)
- Second driveway door opening
- Call and other active functions warning LED
- Possibility to make 2 intercom calls
- Metal bracket for wall mounting with provision for installation with 503 flush-mounting boxes and round 60 mm 2.362 in dia. boxes
- Programming with dip-switch
- Integrated induction loop for hearing-aid users 
- Wall mounting or flush-mounting
- 2 free push buttons for 2 Yokis radio commands (integrated transmitter)
- Panic call
- Call repeater

Dimensions: 6.299 x 5.078 x 0.905 in | 160 x 129 x 23 mm - 1. Call volume adjustment (MAX, MEDIUM; MUTE) - 2. Call and conversation speaker - 3. Display brightness adjustment - 4. Display colour intensity adjustment - 5. Display 4.3" format 16:9 - 6. Microphone - 7. Button used to activate/deactivate audio - 8. Green LED under the (6) button - 9. Door opener button - 10. Green LED under the (9) button - 11. Button for sending activation/deactivation command channel 2 of the integrated Yokis transmitter and at the same time closing the contact between terminals Y1, Y2 (max 50 mA @ 24 Vdc) - 12. Button for sending activation/deactivation command channel 1 of the integrated Yokis transmitter and at the same time closing the contact between terminals X1, X2 (max 50 mA @ 24 Vdc) - 13. 14. Button: see button function table - 15. Multicolour indicator LED - 16. Blue Yokis command transmission confirmation LED - 17. Terminals for connecting to the system - 18. Configuration dip switch: n.1 of SW1, defines the video door phone operating mode: OFF "Hands Free" (default) / ON "Push to talk"; n.2-8 of SW1, define the apartment number in the column; n.1-2 of SW2, define the station number in the apartment - 19. Door to be removed in case of in-out connection with Ref. accessory 1750/50.

Lights control, shutters control and automations, using the 2 buttons with integrated Yokis radio technology

After suitably programming the Yokis devices, it will be possible: to activate the centralised closing of the rollers with a button (for example: ●●); a second button (for example: ●●●) will activate the turning off of the lights.

For further information about **Yokis** products please visit www.yokis.com.

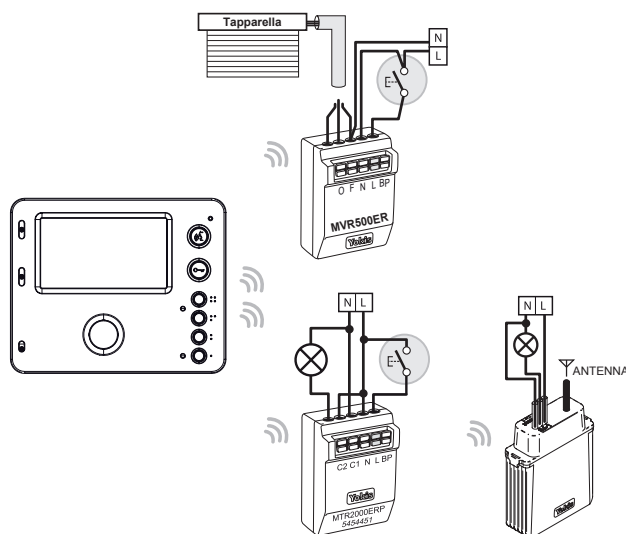

urmet

URMET S.p.A. | Via Bologna, 188/C | 10154 TORINO (ITALY)
Tel. 011.24.00.000
www.urmet.com | info@urmet.com