

JPA-1120A/1240A ATT ZONE AMPLIFIER

FEATURES

- Optional module slot (JCR-10, JTP-10, JCP-10, JDM-10A, JCDDP-10A, JCDR-10A).
- Individual EQ per input.
- Input gain control (microphone-line inputs 1~3).
- Phantom power switch inputs.
- Input 1 by Combo/Din-7 (PTT 10).
- Input 2-3 by Combo (mic-line).
- Input 4-5 by RCA line.
- Pre-amp out / amp-in for extensions with power amplifiers.
- Recording output RCA.
- Telephone paging and night ringer.
- Selective 2-tone / 4-tone chime.
- Priority-switch on Mic 1, 2 & 3.



SPECIFICATIONS

TECHNICAL & GENERAL

| | |
|--|---|
| Input Sensitivity/Impedance | MIC/LINE1~3 : -50dBu(2.45mV) 5KΩ BAL, -10dBu(245mV) 5KΩ BAL LINE 4~5 : -10dBu(245mV) 15KΩ UNBAL TEL PAGING : -10dBu(245mV) 5KΩ BAL PACK UNIT : -10dBu(245mV) 10KΩ UNBAL REC OUT : 0dBu(775mV) 3KΩ UNBAL PRE OUT : 0dBu(775mV) 100Ω UNBAL AMP IN : 0dBu(775mV) 10KΩ UNBAL |
| Rated Output | JPA-1120A : 120W(RMS), JPA-1240A : 240W(RMS) |
| Output Impedance ATT. Step(option) | LOW IMP : 4Ω EUROPE : 100V, 70V, 50V, 25V, 12.5V, 8.9V AMERICA : 70V, 50V, 25V, 12.5V, 8.9V, 6V |
| Frequency Response(line signal) | LESS THAN -3dB(55Hz ~ 16kHz) |
| Signal to Noise Ratio | LINE : MORE THAN 80dB("A" WEIGHT) MIC : MORE THAN 70dB("A" WEIGHT) |
| T.H.D | LESS THAN 1%(1kHz) |
| Power Consumption | JPA-1120A : 350W, JPA-1240A : 630W |
| 1/8 Power Current Draw 120V/230V | JPA-1120A : 1.6A/0.8A JPA-1240A : 2.8A/1.4A |
| 1/3 Power Current Draw 120V/230V | JPA-1120A : 2.4A/1.2A, JPA-1240A : 4A/2A |
| Rated Power Current Draw 120V/230V | JPA-1120A : 3.6A/1.8A JPA-1240A : 6.4A/3.2A |
| Power(option) | 120V/230V/240VAC 50/60Hz , 24VDC |
| Dimensions (mm) (inch) | 430(W) X 133(H) X 352(D) 16.9(W) X 5.2(H) X 13.9(D) |
| Weight(kg/lbs) | JPA-1120A : 13 / 28.7, JPA-1240A : 14 / 30.9 |

Pack Series

JTP-10 FM/AM Tuner



JCP-10 Cassette Deck



JCR-10 Cassette Receiver



JDM-10A Digital Message



JCDP-10A CD Player



CD & Receiver JCDR-10A



JPTT-10 PUSH TO TALK MICROPHONE

FEATURES

- Chime & priority function by P.T.T. (Push To Talk).
- Unidirectional microphone to reduce feedback.
- Auto chime function for use with JPA-1120A/1240A or JMA1410.

JRC-10 REMOTE CONTROLLER

FEATURES

- Microphone with 5 zone speaker selector for use with JPA1120A/1240A.
- Chime function.
- Unidirectional microphone to reduce feedback.
- Remote control for use with JDM-10A module.
- Multiple use of JRC-10 with slave-priority function.
- Audio, data & power through one cable (UTP-Cat5).


JRC-11 REMOTE CONTROLLER

FEATURES


- Microphone with 5 zone speaker selector for use with JPA1120A/1240A.
- Chime function.
- Unidirectional microphone to reduce feedback.
- Multiple use of JRC-11 with slave-priority function.
- Audio, data & power through one cable (UTP-Cat5).



JPTT-10

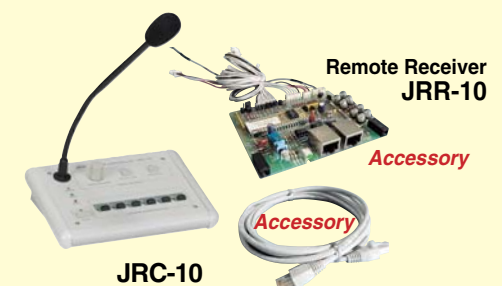


JRC-10

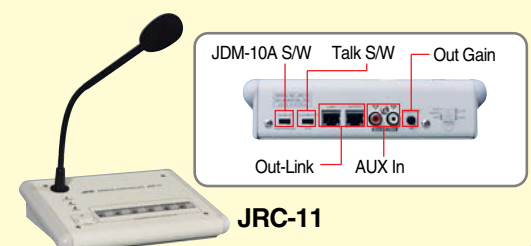

JRC-11

How To Connect system (School)

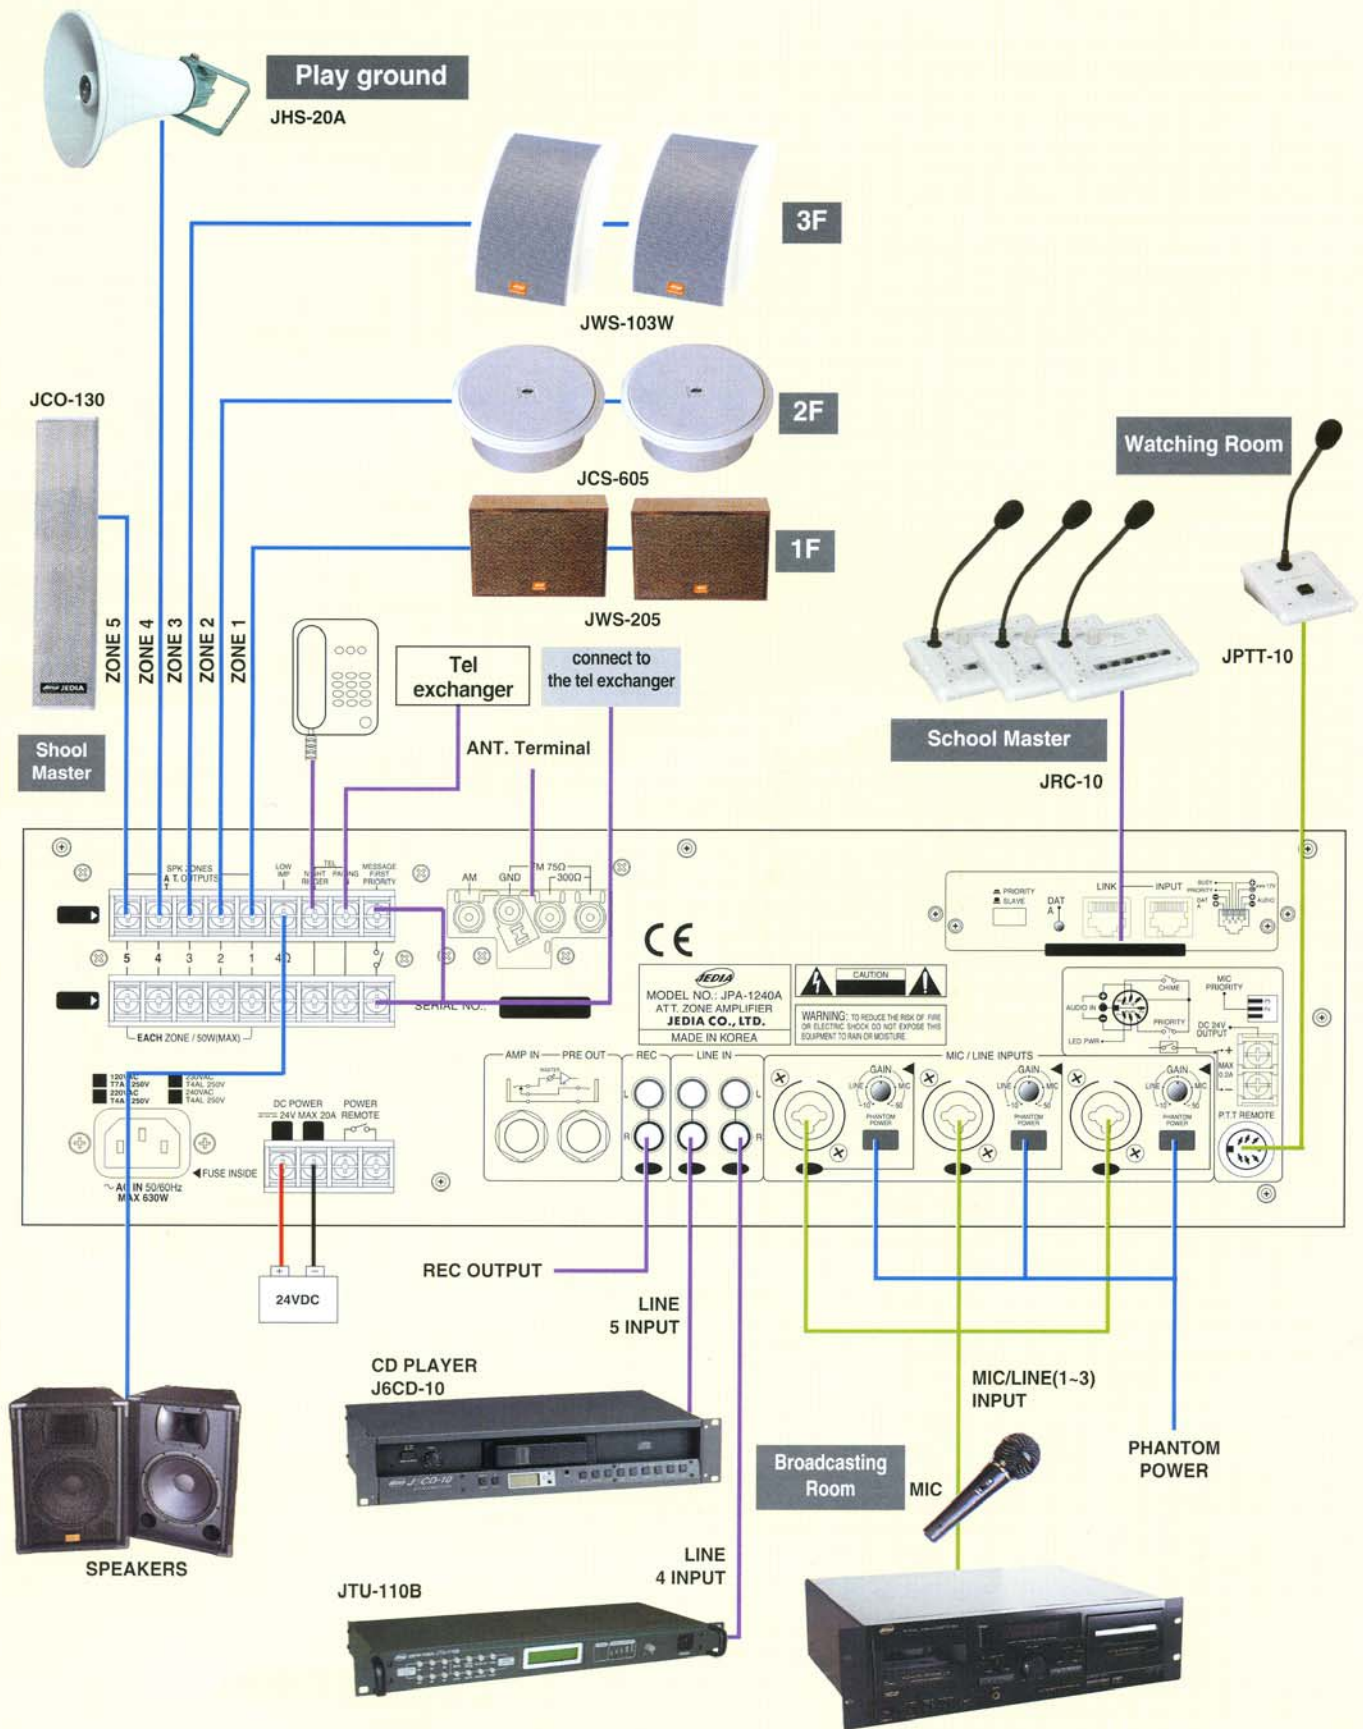

※ Refer to O/P manual for Detailed configuration