



IIDX -100120S

Multi-Energy X-Ray Security Inspection Equipment



Product Instruction

IIDX-100120S is a practical large tunnel design x-ray security equipment which has been widely applied for civil aviation, railways, logistics and other cargo security inspection.

IIDX-100120S has high mobility (and could be easily move to any locations which need the security inspection) through rolling casters
IIDX-100120S is an ideal model for large size luggage scanning because of its advanced image processing platform and various image processing functions.

Technology Features

- + Shiny clear images
- + Sophisticated design with multi-functions operator interface
- + High-resolution
- + Can increase the conveyor speed to 0.3m/s(Customized)
- + Collection the high-speed parallel of detection data
- + With network interface to achieve total network management
- + Support JPG & BMP image transformation format to USB

Applications

- + Civil aviation
- + Highway
- + Port
- + Railway
- + USIORFI



www.iid2secure.nl
 Extra Benefits, Less Price
 Finestrat,19, 03530 La Nucia, Alicante, Spain
 © IID Secure Tech S.L.U. 2019

Heemdtedestraat 16 Amsterdam, Netherlands
 Support@iid2secure.nl
 +31614762425
 Data Subject to change without notice



General Specification

- Tunnel size..... 1020 mm (W) x 1313 mm (H)
- Conveyor Speed.....0.2 m/s
- Conveyor Height.....300 mm
- Max. Load.....200 kg (Evenly distributed)
- Resolution.....Typical: AWG 40 Standard: AWG 36
- Penetration(Steel).....Typical: 32 mm Standard: 30 mm
- Spatial Resolution.....Horizontal: 61.3 mm Vertical: 11.6 mm
- Image Resolution.....22"LED (Single Display)

Image Processing System

- Display.....Black / White, Color
- Processing Function..... F1/F2/F3 self-definition combination, edge enhancement, negative, partial enhancement, gray scale scan.
- Saves Capacity & Pull back.....100,000 images / infinite review (the previous pictures)
- Resolution.....1440= 900
- Processing & Gray Scale.....24Bit real-time processing/8192
- Enlargement.....Up to 64X dynamic continuous zoom & panning

X-Ray Generator

- Anode Voltage.....160 KV (adjustable)
- Beam Deflection.....F' d'de
- X-Ray Sensor.....Multi-energy L photoelectric diode array detector


IPC Configuration

- Standard Function.....Win7; RAM: 2GB; Hard Disk: SOOG.
- Optional Function.....RAM: 4G• 8G• 16G; Hard Disk: 1T. 2T; Video Card: 2G• 4G. 8C:

X-Ray Security

- Leakage.....<1pGy/h (Mem distance from outer), According to the national and international Safety standard
- Film Safety.....According to the ISO1600 (33DIN) High speed standard

side information

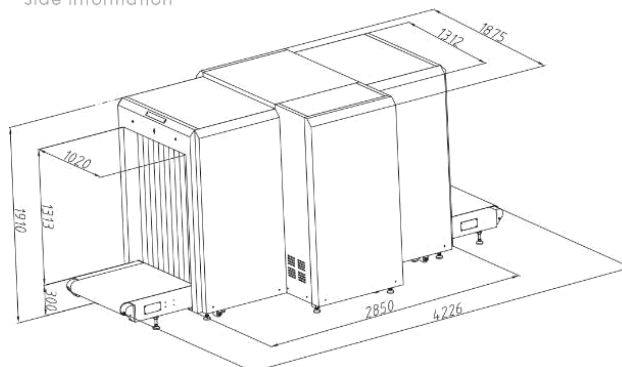

System Function

- Alarm Function
- Browse
- Fault Self-diagnosis and Maintenance Functions
- Image navigation
- Limits of Authority Management for Operator
- System Working Timing
- TIP
- User Management
- Urgent Stop
- Working Status Display
- X-Autosight
- Single-directional Scanning
- Date & Time Display
- High Density Alarm
- Image Magnification Display
- Luggage Counting
- Network Interface
- One-key Shutdown
- Self-wake Power-on
- Save and Retrieval
- Save As
- Ultra-thin Scanning
- X-Ray Emission Timing
- Image Split Joint

Optional Function

- Bi-directional Scanning
- OTP The Operator Training Program
- Video System
- Voltage Stabilizer
- Voice Recording Function
- Double Display
- Energy Saving
- UPS Uninterruptible Power Supply
- Voice Announcement Function

Video System

- Using the professional video equipment, it can combine x-ray image, specific package and its owner into one system, to help operators review and analysis after crisis. With this extended function, the operators can quickly target the potential suspects. This system is not only user friendly but also has the remarkable effects which win the warm praise from the public security police officers.

Installation Data

- Size.....4226 mm (L) x 1875 mm (W) x 1910 mm (H)
- Weight.....1300 KG
- Working Temperature/Humidity.....0°C - +45°C / 10% -95%4 (non-condensing)
- Storage Temperature/Humidity.....-40°C - + 60°C / 10% - 95%4 (non-condensing)
- Power Supply.....AC220V(+1 15%4) 50+W (Hz)
- Power consumption.....About 0.50 (KVA)



www.iid2secure.nl
 Extra Benefits, Less Price
 Finestrat, 19, 03530 La Nucia, Alicante, Spain
 © IID Secure Tech S.L.U. 2019

Heemstedestraat 16 Amsterdam, Netherlands
 Support@iid2secure.nl
 +31614762425
 Data Subject to change without notice